



Fig. 7120

FILTRO CESTA PN16/40 BRIDAS DIN BASKET STRAINER PN16/40 DIN FLANGED

Características / Features


Diseño / Design	Filtro cesta. Tapa atornillada / Basket pattern. Bolted bonnet
Rating	PN16/40
Distancia entre caras / Face to face	Según tabla de dimensiones / According to dimension table
Extremos / Ends	Bridas DIN / DIN Flanged

Materiales / Materials

N°	Descripción / Part name	Material
1	Cuerpo / Body	GG25 / GGG50 / A216 WCB / A351 CF8M
2	Junta / Gasket	AISI 304 + Grafito / EPDM / NBR
3	Tamiz / Screen	AISI 304 / AISI 316

Dimensiones / Main dimensions

Tamaño		PN16						PN40					
DN	NPS	L	H	D	D1	D2	n-ød	L	H	D	D1	D2	n-ød
25	1"	203	120	115	85	68	4-14	160	80	115	85	65	4-14
32	1¼"	203	130	140	100	78	4-18	180	90	140	100	76	4-19
40	1½"	203	140	150	110	88	4-18	200	135	150	110	84	4-19
50	2"	203	150	165	125	102	4-18	230	150	165	125	99	4-19
65	2½"	216	180	185	145	122	4-18	290	160	185	145	118	4-19
80	3"	241	200	200	160	138	8-18	310	200	200	160	132	8-19
100	4"	292	230	220	180	158	8-18	350	240	235	162	190	8-19
125	5"	356	280	250	210	188	8-18	400	290	270	188	220	8-19
150	6"	406	370	285	240	212	8-22	480	330	300	218	250	8-23
200	8"	495	480	340	295	268	12-22	600	380	375	285	320	12-23
250	10"	622	525	405	355	320	12-26	730	480	450	345	385	12-28
300	12"	698	580	460	410	378	12-26	850	550	515	410	450	12-28
400	16"	864	750	580	525	490	16-30	1110	780	660	535	585	16-31
450	18"	978	780	640	585	550	20-30	1200	830	685	560	610	20-31

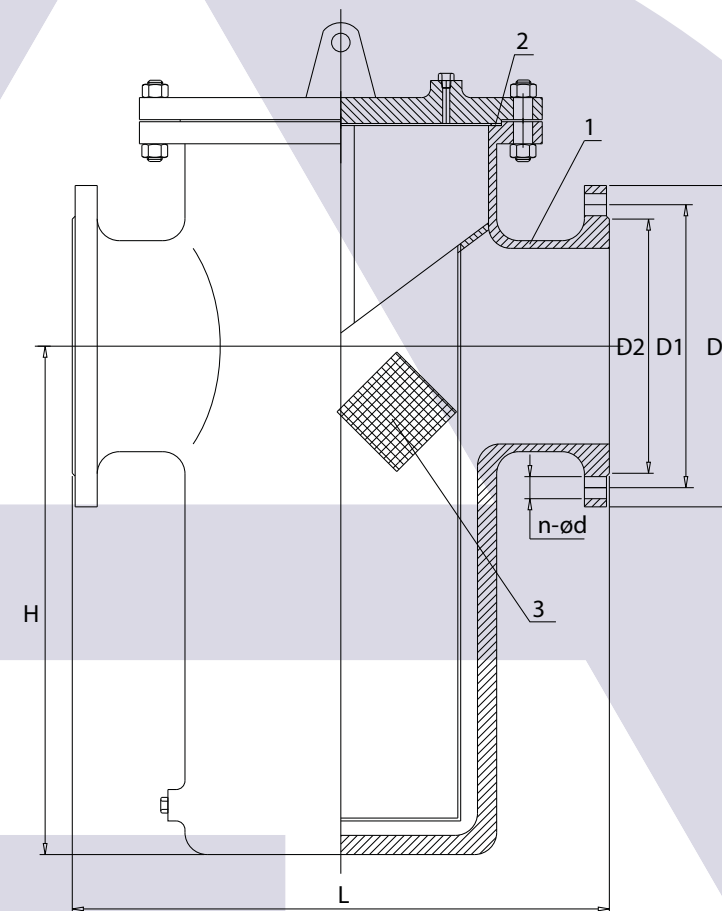

Mediante construcción mecosoldada podemos fabricar cualquier diámetro y en rating hasta PN64
We can also build any size up to PN64 with welded body